

# Overview

LMX150" GPR complements traditional pipe and cable locators and allows you to locate targets below the surface.

- · Metal utilities, including pipes and cables
- · Non-metallic pipes, including PVC and asbestos cement
- · Concrete storm and sewer systems
- · Utilities where installed tracer wiring has failed
- · Underground storage tanks and drainage tiles
- Septic system components
- Fiber optic cables
- Non-utility structures such as vaults, foundation walls and concrete pads




equal intervals

# LMX150 Features


# Rapidly locate metallic and non-metallic utilities

### Enhance your productivity

# Pinpoint Depth & Location



Easy Depth Calibration



No complex settings – Just press Start and push the cart.

Use hyperbola-fitting to ensure accurate depth measurements and backup over the target to display its location and depth.

### Dynamic Stacking (DynaQ®)

DynaQ automatically adjusts stacking (averaging) for the best data quality.

- ☐ White = No data (too fast!)

  Yellow = Moderate quality
- Light blue = Better quality
- Dark blue = Highest quality


### Color-coded field interpretations





Classify your targets in real-time by selecting a color option and touching the screen.

# Increase your target confidence in the field with image optimization


#### Preset Filters










### Dynamic Target Enhancement (DynaT)






### Adjustable Gain







Large



Optimize visibility of your targets with preset filters & gain.


Enhance small, medium & large targets.

# Grids & Depth Slices




### Flexible & guided grid collection

The LMX150 guides you through setup with preselected grid sizes. Stop lines early, or skip lines.



#### Obstacle avoidance

System guides data collection around an obstacle in your grid.

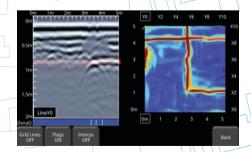

#### In-field Depth slices

Process grid data into depth slices and move down through your data to visualize targets at different depths. Depth Slice through multiple grids on-site.

# LMX150 Bundle

An all-in-one, plug-and-play solution to add high-accuracy positioning to your LMX150 GPR data

The SG bundle unlocks powerful locating & mapping advantages in the field and post-processing.







Flexibility is at the heart of our mapping solutions, allowing customers to choose the solution that is most suitable for their business. With multiple file outputs, utility mapping experts can import utility locations into their advanced systems.

# Features unlocked with **external GNSS**

### Enhanced in-field locating



SplitView: Instantly see interpretations in MapView as you add them to hyperbolas in the cross-section, helping to identify utility targets.



MapView: Visualize your entire GPR survey including depth slices, interpretations and flags to gain better understanding of complex locates.

## Accurately map your findings

١	4	Α	В	С	D	E	F
1	1	Tool	Position (m)	Depth (m)	Latitude	Longitude	GPS-Elevation
	2	Point	0.72	0.18	38.8345202	-9.1821844	16.63
	3	Point	0.83	0.7	38.8345201	-9.1821826	16.6
4	4	Point	1.12	0.75	38.8345187	-9.1821798	16.59
١	5	Point	1.63	0.19	38.8345172	-9.1821759	16.56
1	6	Point	1.63	0.68	38.8345172	-9.1821759	16.56

CSV



Spreadsheet (.CSV) file with georeferenced flags and interpretations can be used to create maps in 3rd party mapping applications.




KMZ



Automatic KMZ output of lines, grids, interpretations and screenshots, allowing utility maps to be easily created.

# EKKO\_Project<sup>™</sup> Software

Visualize, Understand and Report your GPR results with the optional EKKO\_Project PC Software

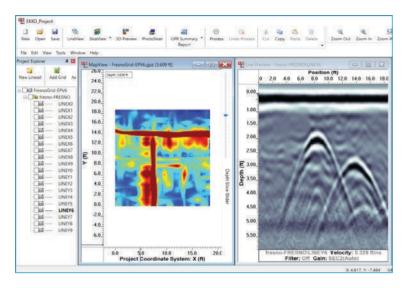







#### Core


Organize your GPR data, photos and other files and save as a single project file. Easily create PDF reports of your findings.



Examine (Cross-sections)



Reveal (Depth Slices)



3D Reveal (3D Visualization)

### **Specifications**

Weight & Dimensions					
Size: $115 \times 55 \times 90$ cm $(45 \times 21 \times 35$ in)  Weight: $19 \text{ kg } (41 \text{ lb})$ (including battery)					
					Display Unit size: 21 cm (8 in) diag
Power					
12 volt sealed lead acid gel cell					
Battery Capacity: 9.0 Ah	Battery Weight: 3.6 kg (7.9 lbs)				
Battery Life: 4-6 hours	<b>Charger:</b> 110-240V				

Envir	Environmental & Temperatures				
Rugge	Ruggedized, environmentally sealed unit and connections				
IP65	Operating temperature range: -20°C to +50°C (-4°F to 122°F)				
Regu	Regulatory Specifications				
Meets	Meets FCC 15.509, IC RSS-220 and ETSI EN-302066				
Data	Storage	Depth			
230 kn	n (143 miles) of data	Up to 3 meters (10 feet)			

### Useful resources available at: www.sensoft.ca

- · Webinars and online resources (www.sensoft.ca/georadar/webinars)
- Training and events (www.sensoft.ca/gpr-training-events)



# **Our Mission**

Provide best in class equipment and solutions, to prevent damage to critical infrastructure, manage assets and protect lives.

# **Our Vision**

To be the world's leader in the management of critical infrastructure and utilities.

## **Our Locations**



### **USA**

Raymond, ME Kearneysville, WV

### Canada

Mississauga, ON



## **Europe**

United Kingdom HQ France Germany The Netherlands



### **Asia Pacific**

India Hong Kong Australia

Visit: www.sensoft.ca

Follow us on: fin X 🗈













Copyright © 2025 Radiodetection Ltd. All rights reserved. Radiodetection is a subsidiary of SPX Technologies, Inc. Sensors & Software, LMX, LMX150, EKKO\_Project, DynaQ, DynaT and Map IT Your Way are either trademarks or registered trademarks of Radiodetection in the United States and / or other countries. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Radiodetection Ltd.