

Trimble X9

3D LASER
SCANNING
SYSTEM

Robust and configurable
3D laser scanning system
you can depend on.



The power to do more, on your terms

Effortless

Smart auto-calibration and self-leveling optimized to increase productivity and function.

Flexible operation with tablet, smart phone or one-button workflow.

Flexible purchase options that give you the control to scan how you like.

Upgrade or downgrade to meet your needs.

Reliable

Configurable scanner speed and range of 500 kHz–80 m and 1000 kHz–150 m.

High sensitivity with all scan modes to capture dark and shiny surfaces fast.

Robust IP55 rating for dust and water jet protection with enclosed center unit.

Survey grade self-leveling with a wide compensation range of $\pm 10^\circ$ for in-field productivity.

Field-ready

Simple and efficient field workflows suitable for all users.

Powerful Trimble® Perspective field software to easily manage and validate projects onsite with auto-registration.

Laser pointer for georeferencing and single point measurements.



Find out more at:
geospatial.trimble.com/x9

Trimble X9

3D laser scanning system



SYSTEM OVERVIEW

Trimble X9 3D laser scanning system	Trimble X-Drive center unit design with combined servo drive/scanning mirror, integrated HDR imaging, automatic calibration, survey-grade self-leveling and laser pointer now provides higher speed, range, accuracy and sensitivity.
Trimble Perspective software	Easy-to-use software for scanner control, automatic infield registration, georeferencing, 3D visualisation, annotations, measurements, processing and export for delivery.

SCANNING PERFORMANCE

GENERAL

Scanning EDM laser class	Laser class 1, eye safe in accordance with IEC EN60825-1	
Laser wavelength	1530–1570 nm, invisible	
Field of view	360° × 282°	
Beam divergence/Beam diameter	0.8 mrad/7.95 mm @ 10 m	
Scan speed ⁸	Core: 500 kHz	Premium: 1000 kHz

RANGE MEASUREMENT

Range principle	High-speed, digital time-of-flight distance measurement	
Range noise ^{1,2}	< 1.5 mm @ 30 m	
Range ^{3,8}	Core: 0.6 m–80 m	Premium 0.6 m–150 m
High sensitivity EDM	Dark (asphalt) and reflective (stainless steel) surfaces	

SCANNING ACCURACY

Validation	Guaranteed over lifetime with auto-calibration	
Range accuracy ^{1,2}	2 mm	
Angular accuracy ^{1,4}	< 16"	
3D point accuracy ^{1,4}	2.3 mm @ 10 m, 3.0 mm @ 20 m, 4.8 mm @ 40 m	

SCANNING PARAMETERS

SCAN MODE	DURATION ^{5,6,7} (MIN:SEC)	SPACING (MM) @ 10 M	SPACING (MM) @ 35 M	SPACING (MM) @ 50 M	NUMBER OF POINTS (MPTS)	MAX FILE SIZE (MB)
Indoor	0:50	15	-	-	6.8	32
Standard	2:03	8	26	38	27.2	95
	3:33	5	18	25	61.2	204
	5:36	4	13	19	108.8	340
High speed	1:27	8	26	38	27.2	175
	3:15	4	13	19	108.8	610
	6:08	3	9	13	244.8	1,250

IMAGING PERFORMANCE

Sensors	3 coaxial, calibrated 10 MP cameras
Resolution	3840 × 2746 pixels for each image
Raw image capture	Fast - 15 images - 158 MP - 1 minute - with HDR 3 minutes Quality - 30 images - 316 MP - 2 minutes - with HDR 6 minutes
Settings	Auto Exposure and HDR Auto White Balance correction and indoor/outdoor presets

AUTOMATIC LEVEL COMPENSATION

Type	Automatic self-leveling, selectable on/off
Range	± 10° (Survey Grade), ± 45° (Coarse)
Upside down	± 10° (Survey Grade)
Survey grade accuracy	< 3" = 0.3 mm @ 20 m

Trimble X9

3D laser scanning system



AUTOMATIC CALIBRATION

Integrated calibration system	Full auto-calibration of range and angular systems when required with no user interaction or targets
Angular calibration	Applies a correction to the collimation error, i.e., the deviation of the horizontal, vertical or sight axis
Range calibration	Applies a distance correction in the albedo and the distance measurement
Smart calibration	Monitors environmental temperature, ambient light, vibration, instrument temperature and vertical speed for optimum performance

TRIMBLE REGISTRATION ASSIST

Inertial navigation system	IMU tracks instrument position, orientation and movement
Auto-registration	Automatic scan orientation and alignment with last or pre-selected scan
Manual registration	Manual alignment or split screen cloud to cloud
Visual checks	Dynamic 2D and 3D viewing for QA
Refinement	Automatic registration refinement
Registration report	Report with project and station average error, overlap and consistency results

GENERAL SPECIFICATIONS

WEIGHT AND DIMENSIONS

Instrument (including battery)	6.045 kg (13.33 lbs)
Internal battery	0.35 kg
Dimensions	178 mm (W) × 353 mm (H) × 170 mm (D)

POWER SUPPLY

Battery type	Rechargeable Li-Ion battery 11.1V, 6.5Ah (Standard for Trimble optical instruments)
Typical duration	3.5 hours per battery (3 batteries included)

ENVIRONMENTAL


Operating temperature	-20 °C to +50 °C (-4 °F to +122 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Ingress protection rating	IP55 (dust protected and water jet)
Relative humidity	95%
Equipment pollution degree	4

OTHERS

Laser pointer	Class 2 laser with a wavelength of 620–650 nm
Remote control	Trimble T10x tablet or comparable Windows® 10 tablet or laptop via WLAN or USB cable
Push button	One-button scan operation
Communications/Data transfer	WLAN 802.11 A/B/G/N/AC or USB Cable
Data storage	Standard SD Card (32 GB SDHC included)
Accessories	Backpack for easy transport and airline carry-on Lightweight carbon fiber tripod with bell connector Quick release adapter for X9 and carbon fiber tripod
Warranty	2 year standard

Trimble X9

3D laser scanning system




TRIMBLE PERSPECTIVE

SYSTEM REQUIREMENTS

Operating system	Microsoft® Windows® 10
Processor	Intel® 8th Generation Core™ i5 processor or better
RAM	16 GB or better
VGA card	Intel HD Graphics 620 or better
Storage	512 GB Solid State Drive (SSD), 1 TB recommended

FEATURES

Scanner operation	Remote control or cable
Trimble registration assist	Automatic and manual registration, refinement and reporting
Data interaction	2D, 3D and Station View
In-field documentation	Scan labels, annotations, pictures and measurements
Auto sync	Automatic data sync from one-button operation
Georeferencing	Laser pointer for georeferencing and precision point measurement
Reports	Registration, Field Calibration and Diagnostics reports
Data redundancy	Data stored on SD Card and tablet
Data integration	Export formats to support Trimble and non-Trimble software File formats: TDX, TZF, E57, PTX, RCP, LAS, POD
Purchasing options	Flexible configurations available through term or perpetual licensing

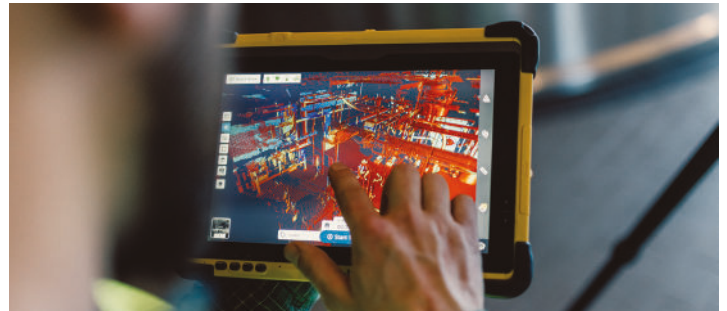

- 1 Specification given as 1 sigma.
- 2 On 80% albedo. Albedo given @ 1550 nm
- 3 On matte surface with normal angle of incidence. High speed range of 120 m.
- 4 After automatic calibration and self-leveling within ± 10°.
- 5 Durations for scan times include self-leveling time within ± 10°.
- 6 Self-leveling will take ~ 10 seconds longer when scanner is not within ± 10°.
- 7 Scan times can increase up to 45 seconds for full calibrations after startup or idle time until thermal stabilization. Full system checks occur every 30 min.
- 8 Scan speed and range depends on the instrument configuration

Specifications subject to change without notice.

FRONTIER PRECISION
GEOSPATIAL

sales@frontierprecision.com
www.frontierprecision.com/solutions/geospatial

Contact your local Trimble Authorized
Distribution Partner for more information.

NORTH AMERICA
Trimble Inc.
10368 Westmoor Dr
Westminster CO 80021
USA

EUROPE
Trimble Germany GmbH
Am Prime Parc 11
65479 Raunheim
GERMANY

ASIA-PACIFIC
Trimble Navigation
Singapore PTE Limited
3 HarbourFront Place
#13-02 HarbourFront Tower Two
Singapore 099254
SINGAPORE

